Apollo Dental Products
by MIDMARK®

Specification Sheet

Twin Vacuum System

Model Shown: **VB10TNR**

***Note:** Some Local Codes Require A Reduced Pressure (RP) Backflow Preventor On The Incoming Water Line.

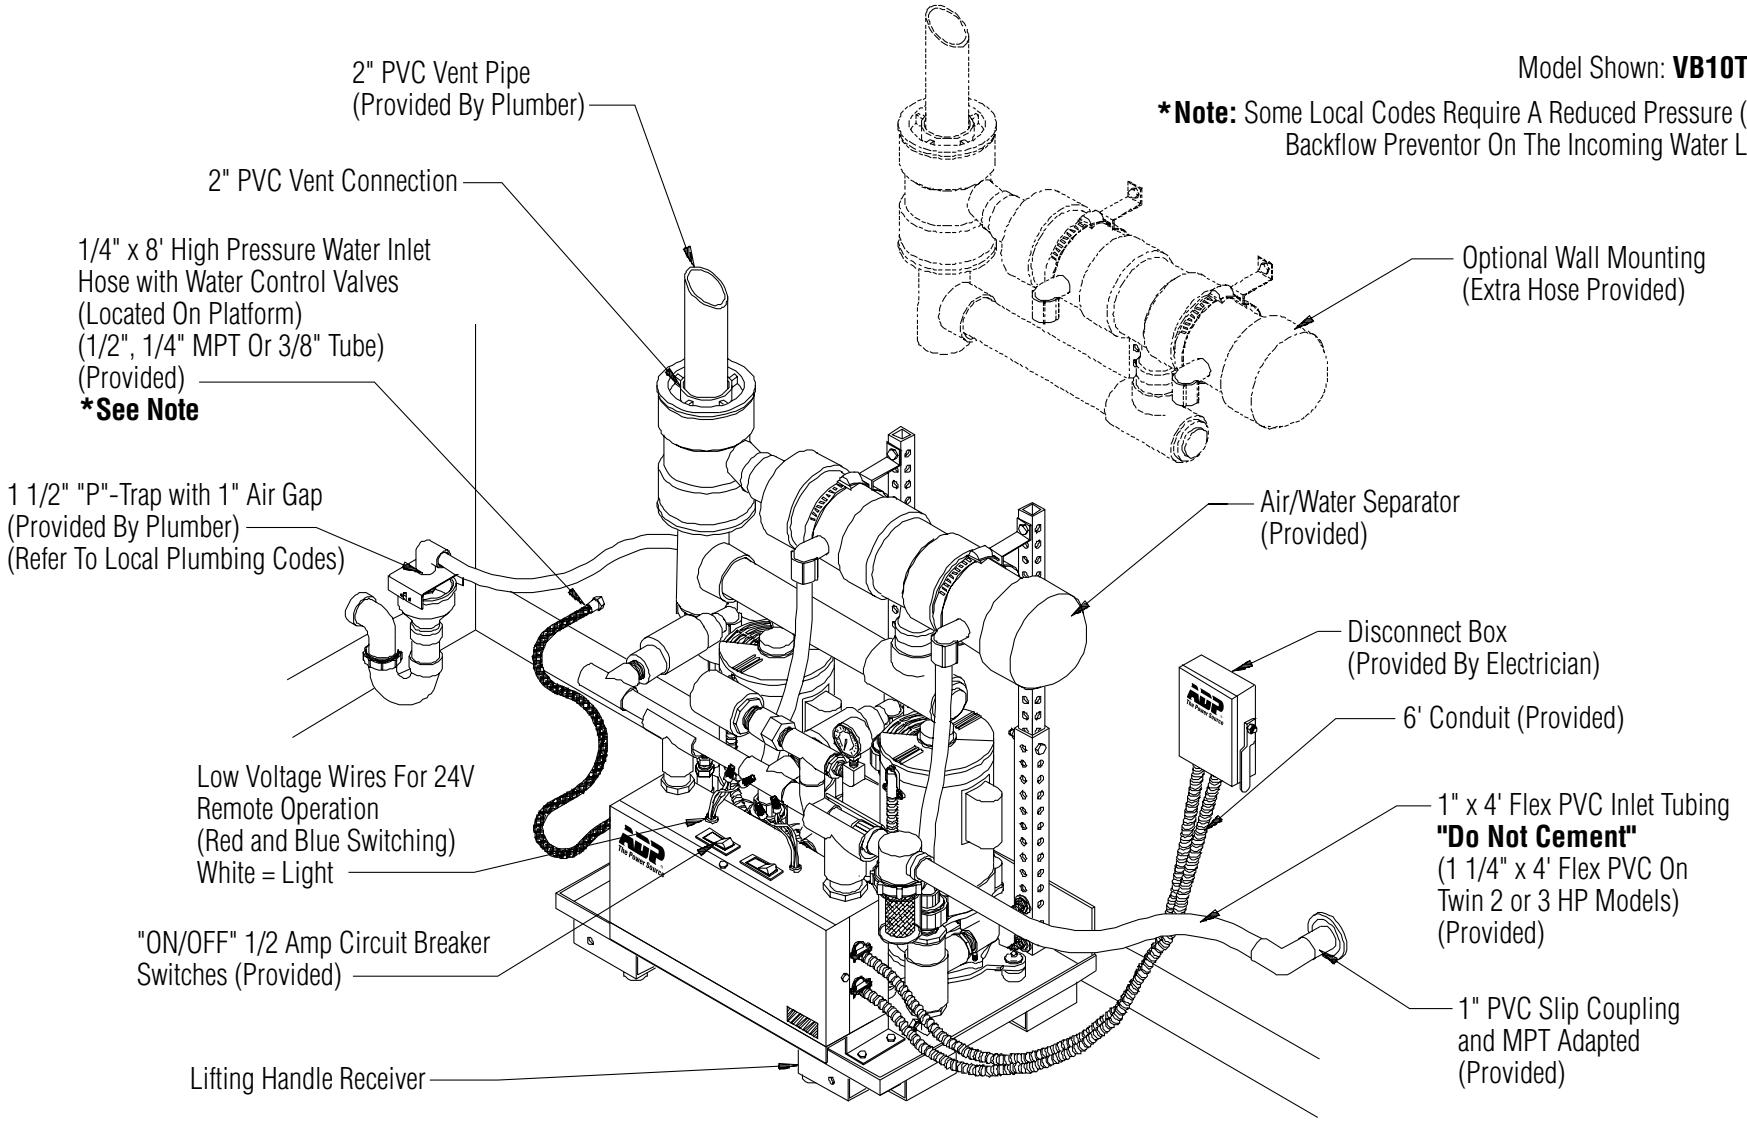

Apollo Dental Products, Inc.
245 West Dakota Avenue • Clovis, California 93612 • Phone: 559/292-1444 • 800/233-4151 • Fax: 559/292-1555
www.apollodental.com

AMM40405 Rev. 12/00

Apollo Dental Products by MIDMARK®

Specification Table

Twin Vacuum System

Technical Service
(800) 233-4151

Vacuum Model	Max. Number Of Users	Width	Depth	Height	Weight (Shipping)	Total Horsepower	Voltage	Amps (Per Pump)	Hertz	Breaker Size (One Per Pump)	Total Water* Consumption (GPM)	Vacuum Inlet Connection (PVC Slip)	Vacuum Drain Connection (PVC Slip)	Exhaust Separator Vent Link	Fresh Water Connection (NPT)	Dispos-A-Bowl Replacement 1 Per Twin System
AVB10TN	5	26 in.	18 in.	20 in.	191 lb.	2	115/208-230	16.1/8.1	60	30/20	1.0	1 in.	3/4 in.	N/A	1/2, 1/4 in. or 3/8 in. Tube	AVA60011
AVB10TNF	5	66 cm.	46 cm.	51 cm.	87 kg.	2	220	7.9	50	20	1.0	25.4 mm.	19 mm.	N/A	3/8 in. BSPT-F	AVA60011
AVBT10TNFX	5	66 cm.	46 cm.	76 cm.	91 kg.	2	220	7.9	50	20	1.0	25.4 mm.	19 mm.	50.8 mm	3/8 in. BSPT-F	AVA60011
AVBT10TNX	5	26 in.	18 in.	30 in.	200 lb.	2	115/208-230	16.1/8.1	60	30/20	1.0	1 in.	3/4 in.	2 in.	1/2, 1/4 in. or 3/8 in. Tube	AVA60011
AVG10TNFX / AVU10TNFX	6	66 cm.	46 cm.	76 cm.	90 kg.	2	220	7.9	50	20	1.0	25.4 mm.	19 mm.	50.8 mm	3/8 in. BSPT-F	AVA60011
AVG10TNX / AVU10TNX	6	26 in.	18 in.	30 in.	199 lb.	2	115/208-230	16.1/8.1	60	30/20	1.0	1 in.	3/4 in.	2 in.	1/2, 1/4 in. or 3/8 in. Tube	AVA60011
AVB15TN	6	26 in.	18 in.	20 in.	203 lb.	3	208-230	11	60	20	1.0	1 in.	3/4 in.	N/A	1/2, 1/4 in. or 3/8 in. Tube	AVA60011
AVB15TNF	6	66 cm.	46 cm.	51 cm.	92 kg.	3	220	10.6	50	20	1.0	25.4 mm.	19 mm.	N/A	3/8 in. BSPT-F	AVA60011
AVB15TNFX	6	66 cm.	46 cm.	76 cm.	96 kg.	3	220	10.6	50	20	1.0	25.4 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60011
AVB15TNX	6	26 in.	18 in.	30 in.	212 lb.	3	208-230	11	60	20	1.0	1 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60011
AVG15TNFX / AVU15TNFX	7	66 cm.	46 cm.	76 cm.	93 kg.	3	220	10.6	50	20	1.0	25.4 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60011
AVG15TNX / AVU15TNX	7	26 in.	18 in.	30 in.	204 lb.	3	208-230	11	60	20	1.0	1 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60011
AVB20TN	7	26 in.	18 in.	22 in.	217 lb.	4	208-230	13.4	60	20	1.0	1 in.	3/4 in.	N/A	1/2, 1/4 in. or 3/8 in. Tube	AVA60011
AVB20TNF	7	66 cm.	46 cm.	56 cm.	98 kg.	4	220	13.4	50	20	1.0	25.4 mm.	19 mm.	N/A	3/8 in. BSPT-F	AVA60011
AVB20TNFX	7	66 cm.	46 cm.	81 cm.	103 kg.	4	220	13.4	50	20	1.0	25.4 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60011
AVB20TNX	7	26 in.	18 in.	32 in.	226 lb.	4	208-230	13.4	60	20	1.0	1 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60011
AVG20TNFX / AVU20TNFX	10	66 cm.	46 cm.	81 cm.	104 kg.	4	220	13.4	50	20	1.0	32 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60021
AVG20TNX / AVU20TNX	10	26 in.	18 in.	32 in.	229 lb.	4	208-230	13.4	60	20	1.0	1 1/4 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60021
AVG30TNFX / AVU30TNFX	12	66 cm.	46 cm.	81 cm.	108 kg.	6	220	14	50	30	1.0	32 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60021
AVG30TNX / AVU30TNX	12	26 in.	18 in.	32 in.	237 lb.	6	208-230	14	60	30	1.0	1 1/4 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60021

Options: All models are equipped with separators, except **"AVB10TN"**, **"AVB15TN"** and **"AVB20TN"** models. To order with a water recycler*, simply replace **"X"** with **"R"**. For models AVB10TN, AVB15TN and AVB20TN, single pump operation not recommended.

*Recycler models consume .19 GPM of water per pump. (.38 GPM total per twin system).

Example: Vacuum model **AVU10TNX** with recycler will be read as **AVU10TNR**.

NEW
For optimum performance, use the
New StayClean™ Product Line
Exclusively by Apollo Dental Products

Notes: A **dedicated electrical circuit** with circuit breaker **must be provided** for **each** vacuum pump and both are to run at all times. Ambient temperature must be within the range of 40 degrees Fahrenheit minimum (4˚C) to 100 degrees Fahrenheit maximum (38˚C).

"AVU" is UltraVac®
"AVB" is Classic Bronze™
"AVG" is Gold Series™
"F" denotes 50Hz systems